



LAND GROUP
FOR NEXT MIRACLE

ProMeasure STEEL TAPE



Main Features:

- High-grade steel scale tape, straightness stronger;
- High quality blade with clear graduation;
- Ergonomically and popular design;
- Excellent locking system holds blade firmly.

Model	Image	Image	Image (mm)	QTY	LBS	CU FT	PCS	KG
3N56W	3m/10ft	16mm	-	-	-	-	-	-
5N56E	5m/16ft	19mm	465x220x275	120	22	-	-	
5N56X	5m/16ft	25mm	550x295x265	120	30	-	-	
7HN56X	7.5m/25ft	25mm	590x180x270	60	23	-	-	



Main Features:

- High-grade steel scale tape, straightness stronger;
- High quality blade with clear graduation;
- Ergonomically and popular design;
- Resistance to drop & prevent slippery Rubber;
- Excellent locking system holds blade firmly.

Model	Image	Image	Image (mm)	QTY	LBS	CU FT	PCS	KG
3N50W	3m/10ft	16mm	-	-	-	-	-	-
5N50E	5m/16ft	19mm	-	-	-	-	-	-
5N50X	5m/16ft	25mm	715x335x215	60	23	-	-	
7HN50X	7.5m/25ft	25mm	505x365x215	120	30	-	-	
10N50X	10m/33ft	25mm	-	-	-	-	-	



LAND GROUP
FOR NEXT MIRACLE

ProMeasure STEEL TAPE



NEW
Series N39



Main Features:

- High-grade steel scale tape, straightness stronger.
- High quality blade with clear graduation;
- Ergonomically and popular design;
- Co-molded rubber case, shockproof and comfortable grip;
- Excellent locking system holds blade firmly.

Packing Date:

Patent: ZL 2014 30075735.1

Model	Length	Blade Thickness	QTY./LBS./CU FT	PCS	KG
3N39W	3m/10ft	16mm	680×420×255	120	19/17
5N39E	5m/16ft	19mm	810×420×255	120	23/21
5N39X	5m/16ft	25mm	520×335×395	72	18/16
7HN39X	7.5m/25ft	25mm	780×260×305	50	21/19
10N39X	10m/33ft	25mm	530×330×210	60	30/28



NEW



VISIBLE SPRING

Series N35

Main Features:

- High-grade steel scale tape, STRAIGHTNESS stronger
- ABS case with high quality
- Ergonomically and popular design
- Excellent locking system holds blade firmly
- High quality blade with clear graduation
- Shock absorbing device at the blade retraction

Model	Length	Blade Thickness	QTY./LBS./CU FT	PCS	KG
3N35	3m/10ft	12.5mm	480×370×300	200	17/15
3N35W	3m/10ft	16mm	480×370×300	200	17/15
5N35E	5m/16ft	19mm	490×340×320	120	23/21
5N35X	5m/16ft	25mm			
7HN35X	7.5m/25ft	25mm	580×350×210	60	20/18



NEW

Series N32

Main Features:

- High quality blade with clear graduation
- Co-molded rubber case, shockproof and comfortable grip
- Excellent locking system holds blade firmly

Model	Length	Blade Thickness	QTY./LBS./CU FT	PCS	KG
3N32	3m/10ft	12.5mm	405×335×245	120	17/15
3N32W	3m/10ft	16mm	405×335×245	120	17/15
5N32E	5m/16ft	19mm	455×280×200	120	21/19
7HN32X	7.5m/25ft	25mm	455×280×250	60	22/20
10N32X	10m/25ft	25mm		60	



NEW

Series N31

Main Features:

- Selflock system
- Comfortable grip

Selflock

Model	Length	Blade Thickness	QTY./LBS./CU FT	PCS	KG
3N31W	3m/10ft	16mm	630×320×240	120	21/19
5N31E	5m/16ft	19mm	665×360×300	120	23/21
7HN31X	7.5m/25ft	25mm	730×350×205	60	22/20



LAND GROUP
FOR NEXT MIRACLE

ProMeasure STEEL TAPE



HOT

Main Features

- Blade with accuracy class I, precise and clear graduation;
- POM button which holds blade firmly;



Model	Blade Width	Blade Thickness (mm)	QTY./LBS./CU FT	PCS	KG
3N30W	3m/10ft	16mm	810×420×255	120	15/13
5N30E	5m/16ft	19mm	680×420×255	100	22/20
5N30X	5m/16ft	25mm	520×335×425	72	18/16
7HN30X	7.5m/25ft	25mm	780×260×305	50	21/19

Series N30



HOT

Main Features:

- Blade with accuracy class I, precise and clear graduation;
- POM button which holds blade firmly;



Model	Blade Width	Blade Thickness (mm)	QTY./LBS./CU FT	PCS	KG
3N30-1W	3m/10ft	16mm	810×420×255	120	15/13
5N30-1E	5m/16ft	19mm	680×420×255	100	22/20
5N30-1X	5m/16ft	25mm	520×335×425	72	19/17
7HN30-1X	7.5m/25ft	25mm	780×260×305	50	21/19

Series N30-1



Series N27

Main Features:

- High quality rubber case, Shockproof and comfortable grip.
- With rubber button for better operation.
- Attractive appearance.

Rubber Coat

Patent:201030582025.X

Model	Blade Width	Blade Thickness (mm)	QTY./LBS./CU FT	PCS	KG
LD-3N27	3m/10ft	12.5mm	500×320×275	120	25/23
LD-5N27E	5m/16ft	19mm	505×350×260	120	27/25
LD-5N27X	5m/16ft	25mm	570×195×325	120	36/34
LD-8N27X	8m/26ft	25mm	645×220×340	60	23/21



NEW

Main Features

- Ergonomically and popular designed.
- Co-molded rubber case, shockproof and comfortable grip.
- Excellent locking system holds blade firmly.

Series N25

Shockproof

Patent:201030514261.8

Model	Blade Width	Blade Thickness (mm)	QTY./LBS./CU FT	PCS	KG
LD-3N25W	3m/10ft	16mm	405×335×245	120	23/21
LD-5N25E	5m/16ft	19mm	455×280×200	120	27/25
LD-7HN25X	7.5m/25ft	25mm	455×280×250	60	22/20



NEW

Main Features

- High quality rubber case, Shockproof and comfortable grip.
- With rubber button for better operation.
- Attractive appearance.

Series N23

Rubber Coat

Patent:201030223760.1

Model	Blade Width	Blade Thickness (mm)	QTY./LBS./CU FT	PCS	KG
3N23W	3m/10ft	16mm	670×340×340	120	27/25
5N23E	5m/16ft	19mm	670×340×340	120	27/25
7HN23E	7.5m/25ft	25mm	670×340×340	60	27/25



NEW

Main Features

- Ergonomically and popular designed.
- Co-molded rubber case, shockproof and comfortable grip.
- Excellent locking system holds blade firmly.

Series N21

Shockproof

Patent:201030223764.X

Model	Blade Width	Blade Thickness (mm)	QTY./LBS./CU FT	PCS	KG
LD-3N21W	3m/10ft	16mm	505×315×270	120	21/19
LD-5N21E	5m/16ft	19mm	570×370×280	120	24/22
LD-8N21X	8m/26ft	25mm	640×350×200	60	20/18



LAND GROUP
FOR NEXT MIRACLE

ProMeasure STEEL TAPE



NEW

Main Features

- With first creat upper temporary stop design, complying with the principle of ergonomics.
- Prolonged tape mouth to have better feel and lessen the possibility of hurting hand.
- Double colour injection, attractive appearance.
- Beautiful and elegant appearance.



Created Design of Stop Button

Patent:200830127296.9

Model	Blade Width (mm)	Blade Thickness (mm)	QTY./LBS./CU FT (mm)	PCS	KG
LD-5N20E	5m/16ft	19mm	455x280x200	60	21/19
LD-3N20W	3m/10ft	16mm	405x335x245	120	23/21

Series N20



Main Features

- Co-molded rubber case with stainless steel label, for comfortable grip and shockproof.
- Nylon coated blade more durable longer life time accuracy EEC class II.
- Self lock system allows blade to be extended smoothly.
- Easy to use thumb button Push button retrieval.
- High quality strap and chrome-plated hook.
- Double colour injection, attractive appearance.



Series 81 -1

Self lock Stainless steel case

Patent:200830127295.4

Model	Blade Width (mm)	Blade Thickness (mm)	QTY./LBS./CU FT (mm)	PCS	KG
LD-381W	3m/10ft	16mm	640x330x280	120	19/17
LD-581E	5m/16ft	19mm	670x360x300	120	22/20
LD-581X	5m/16ft	25mm	670x360x345	120	23/21
LD-881X	8m/26ft	25mm	720x215x350	60	25/23

Series 81, -1



HOT

Main Features

- High quality stainless steel case with rubber protect shockproof.
- Co-molded rubber button for comfortable grip.
- Double color injection, attractive appearance.
- Provide powerful locking to hold the blade securely at any position.

Metal Case

Patent:200820083622.5

Model	Blade Width (mm)	Blade Thickness (mm)	QTY./LBS./CU FT (mm)	PCS	KG
LD-5N18E	5m/16ft	19mm	620x270x220	120	25/23
LD-8N18X	8m/26ft	25mm	455x280x220	60	21/19

Series N18



HOT

Main Features

- High quality rubber case, Shockproof and comfortable grip.
- With rubber button for better operation.
- Attractive appearance.



Series N17

High Quality Chrome

Patent:200730146868.3

Model	Blade Width (mm)	Blade Thickness (mm)	QTY./LBS./CU FT (mm)	PCS	KG
LD-3N17W	3m/10ft	16mm	630x330x315	120	23/22
LD-5N17E	5m/16ft	19mm	670x345x320	120	25/23
LD-8N17X	8m/26ft	25mm	720x210x350	60	21/19

HOT

Main Features

- Best quality rubber case, shockproof.
- Attractive appearance and comfortable touch.
- Self lock system allows blade securely at any position.



Series N12

Self lock & shockproof case

Model	Blade Width (mm)	Blade Thickness (mm)	QTY./LBS./CU FT (mm)	PCS	KG
LD-3N12W	3m/10ft	16mm	500x320x275	120	25/23
LD-5N12E	5m/16ft	19mm	505x350x260	120	27/25
LD-5N12X	5m/16ft	25mm	570x195x325	120	36/34
LD-7HN12X	7.5m/25ft	25mm	645x220x340	60	23/21
LD-10N12X	10m/33ft	25mm	720x310x230	60	32/30

HOT

Main Features

- Three stop buttons, easy for operation.
- With rubber cover, attractive appearance and comfortable touch.
- Harmonized design as per ergonomics.



Series N09

Model	Blade Width (mm)	Blade Thickness (mm)	QTY./LBS./CU FT (mm)	PCS	KG
LD-2N09W	2m/6ft	16mm	630x330x315	120	11/10
LD-2HN09W	2.5m/9ft	16mm	630x330x315	120	14/12
LD-3N09W	3m/10ft	16mm	630x330x315	120	17/15
LD-5N09E	5m/16ft	19mm	670x345x320	120	27/25
LD-5N09X	5m/16ft	25mm	670x345x320	120	27/25
LD-7HN09X	7.5m/25ft	25mm	720x210x350	60	25/23
LD-8N09X	8m/26ft	25mm	720x210x350	60	26/24
LD-10N09X	10m/33ft	25mm	720x210x350	60	30/28



LAND GROUP
FOR NEXT MIRACLE

ProMeasure
STEEL TAPE



HOT



Series N10

Patent:200730002195.4

Model	Image	Thickness (mm)	QTY/LBS.CU FT	PCS	KG
LD-3N10		12.5mm	500×320×275	120	25/23
LD-3N10W		16mm	505×350×260	120	27/25
LD-5N10E		19mm	570×195×325	120	36/34
LD-7HN10X		25mm	645×220×340	60	23/21
LD-8N10X		25mm	720×310×230	60	32/30

Series N03

Model	Image	Thickness (mm)	QTY/LBS.CU FT	PCS	KG
LD-2N03		12.5mm	420×320×205	120	11/9
LD-3N03		12.5mm	420×330×205	120	16/14
LD-5N03E		19mm	465×365×235	120	24/22
LD-7HN03X		25mm	530×280×220	60	26/24



Series 97

Model	Image	Thickness (mm)	QTY/LBS.CU FT	PCS	KG
LD-297W		16mm	640×350×270	120	13/12
LD-397		12.5mm	640×340×260	120	13/12
LD-397W		16mm	640×350×270	120	16/14
LD-597E		19mm	670×350×285	120	25/23
LD-7H97X		25mm	720×210×310	60	23/21
LD-897X		25mm	720×210×310	60	24/22



Series 96

Model	Image	Thickness (mm)	QTY/LBS.CU FT	PCS	KG
LD-296		12.5mm	430×380×280	200	21/19
LD-396		12.5mm	430×380×280	200	23/21
LD-396W		16mm	420×390×300	200	26/24
LD-596E		19mm	470×320×210	100	21/19
LD-896X		25mm	510×235×210	50	20/18



HOT



Series N02

Model	Image	Thickness (mm)	QTY/LBS.CU FT	PCS	KG
LD-2N02		12.5mm	420×305×205	120	11/9
LD-3N02		12.5mm	420×330×205	120	16/14
LD-3N02W		16mm	425×330×275	120	17/15
LD-5N02E		19mm	485×380×305	96	24/22
LD-5N02X		25mm	485×390×340	96	26/24
LD-7HN02X		25mm	430×350×460	72	28/25

Series 99

Patent:200430003099.9

Model	Image	Thickness (mm)	QTY/LBS.CU FT	PCS	KG
LD-399W		16mm	510×325×260	96	13/12
LD-399E		19mm	510×325×260	96	12/11
LD-599E		19mm	340×250×385	60	16/14
LD-7H99X		25mm	385×320×290	48	27/25



Series 92

Model	Image	Thickness (mm)	QTY/LBS.CU FT	PCS	KG
LD-392		12.5mm	640×340×460	240	22/20
LD-392W		16mm	640×350×300	120	23/21
LD-592E		19mm	670×370×310	120	25/23
LD-5H92E		19mm	670×370×310	120	26/24
LD-7H92X		25mm	720×205×300	60	27/25
LD-892X		25mm	720×205×300	60	27/25



Series 90

Model	Image	Thickness (mm)	QTY/LBS.CU FT	PCS	KG
LD-290		12.5mm	630×330×250	240	13/12
LD-290W		16mm	630×340×270	120	14/12
LD-390		12.5mm	630×330×210	120	15/13
LD-390W		16mm	630×340×270	120	16/14
LD-590E		19mm	670×360×280	120	26/24
LD-7H90X		25mm	720×210×320	60	22/20
LD-890X		25mm	720×210×320	60	23/21



LAND GROUP
FOR NEXT MIRACLE

ProMeasure STEEL TAPE



HOT



Series 89

Model	Width	Thickness	QTY/LBS.CU FT	PCS	KG
LD-389W	3m/10ft	16mm	640*340*310	120	20/18
LD-589E	5m/16ft	19mm	670*360*315	120	28/26
LD-589X	5m/16ft	25mm	670*360*365	120	35/33
LD-7H89X	7.5m/25ft	25mm	720*215*360	60	24/22

Series 85

Model	Width	Thickness	QTY/LBS.CU FT	PCS	KG
LD-288	2m/6ft	12.5mm	640*340*230	120	
LD-388	3m/10ft	12.5mm	640*340*230	120	13/11
LD-588E	5m/16ft	19mm	640*340*270	120	22/20
LD-7H88X	7.5m/25ft	25mm	720*210*300	60	22/20
LD-1088X	10m/33ft	25mm	720*210*330	60	28/26

Series 84-1

Model	Width	Thickness	QTY/LBS.CU FT	PCS	KG
LD-285	2m/6ft	12.5mm	405*380*280	240	20/18
LD-385	3m/10ft	12.5mm	405*380*280	240	22/20
LD-385W	3m/10ft	16mm	405*380*280	240	23/21
LD-385E	3m/10ft	19mm	405*380*280	240	28/26
LD-3H85	3.5m/12ft	12.5mm	405*380*280	240	23/21
LD-3H85W	3.5m/12ft	16.5mm	405*380*280	240	24/22
LD-585W	5m/16ft	16mm	405*380*280	240	26/24
LD-585E	5m/16ft	19mm	405*335*245	120	21/19
LD-585X	5m/16ft	25mm	405*340*277	120	22/20
LD-5H85X	5.5m/18ft	25mm	405*340*277	120	23/22
LD-7H85X	7.5m/25ft	25mm	455*280*200	60	21/19
LD-885X	8m/26ft	25mm	455*280*220	60	27/25
LD-885G	8m/26ft	32mm	420*270*200	60	27/25
LD-1085X	10m/33ft	25mm	510*290*200	60	27/25
LD-1085G	10m/33ft	32mm	510*290*420	60	27/25

Series 84-1

Model	Width	Thickness	QTY/LBS.CU FT	PCS	KG
LD-284-1	2m/6ft	12.5mm	405*380*360	200	25/23
LD-384-1	3m/10ft	12.5mm	455*370*340	200	25/23
LD-584-1E	5m/16ft	19mm	430*380*190	100	20/18
LD-7H84-1X	7.5m/25ft	25mm	480*420*245	50	18/16
LD-884-1X	8m/26ft	25mm	255*230*180	50	18/16



Series 87

Model	Width	Thickness	QTY/LBS.CU FT	PCS	KG
LD-387W	3m/10ft	16mm	630*340*260	120	16/14
LD-3H87W	3.5m/12ft	16mm	630*340*260	120	16/14
LD-587E	5m/16ft	19mm	550*275*350	120	27/25
LD-587X	5m/16ft	25mm	670*350*305	120	31/29
LD-5H87X	5.5m/18ft	25mm	670*350*305	120	32/30
LD-7H87X	7.5m/25ft	25mm	510*240*225	60	22/20
LD-887X	8m/26ft	25mm	480*195*280	60	22/20
LD-1087X	10m/33ft	25mm	510*240*225	60	27/25

Series 86

Model	Width	Thickness	QTY/LBS.CU FT	PCS	KG
LD-288	2m/6ft	12.5mm	560*230*390	120	12/10
LD-388	3m/10ft	12.5mm	640*340*240	120	17/15
LD-388W	3m/10ft	16mm	640*330*280	120	19/17
LD-3H88	3.5m/12ft	12.5mm	640*340*240	120	17/15
LD-3H88W	3.5m/12ft	16mm	640*330*280	120	19/17
LD-588E	5m/16ft	19mm	670*360*300	120	29/27
LD-588X	5m/16ft	25mm	670*360*300	120	35/33
LD-7H86X	7.5m/16ft	25mm	720*215*350	60	25/23
LD-886X	8m/26ft	25mm	720*210*270	60	25/23
LD-886G	8m/26ft	32mm	455*280*220	60	25/23
LD-986G	9m/30ft	32mm	455*280*220	60	27/25
LD-1086X	10m/33ft	25mm	510*290*200	60	27/25
LD-1086G	10m/33ft	32mm	510*290*250	60	29/27



Series 83

Model	Width	Thickness	QTY/LBS.CU FT	PCS	KG
LD-383E	3m/10ft	19mm	380*280*210	105	16/14
LD-583X	5m/16ft	25mm	480*380*385	60	16/14
LD-883X	8m/26ft	25mm	480*380*395	60	18/16



Series 82

Model	Width	Thickness	QTY/LBS.CU FT	PCS	KG
LD-382	3m/10ft	12.5mm	630*330*210	120	14/12
LD-582E	5m/16ft	19mm	670*360*280	120	26/24
LD-582X	5m/16ft	25mm	670*360*310	120	31/29
LD-5H82X	5.5m/18ft	25mm	670*360*310	120	31/29
LD-7H82X	7.5m/25ft	25mm	720*210*320	60	22/20
LD-882X	8m/26ft	25mm	620*200*450	60	23/21



LAND GROUP
FOR NEXT MIRACLE

ProMeasure STEEL TAPE



VISIBLE SPRING

Series 80

Model	Width	Thickness	QTY (mm)	PCS	KG
			QTY LBS.CU FT		
LD-580X	5m/16ft	25mm	380x280x360	100	25/23



HOT


Series 79

Model	Width	Thickness	QTY (mm)	PCS	KG
			QTY LBS.CU FT		
LD-279	2m/6ft	12.5mm	640x340x240	120	16/14
LD-379W	3m/10ft	16mm	640x330x280	120	17/15
LD-379E	3m/10ft	19mm	640x330x280	120	19/17
LD-579W	5m/16ft	16mm	500x350x235	120	19/17
LD-579E	5m/16ft	19mm	670x360x300	120	29/27
LD-579X	5m/16ft	25mm	670x360x345	120	35/33
LD-7H79X	7.5m/25ft	25mm	720x215x350	60	24/22
LD-879X	8m/26ft	25mm	720x215x350	60	25/23



Series 57

Model	Width	Thickness	QTY (mm)	PCS	KG
			QTY LBS.CU FT		
LD-357	3m/10ft	12.5mm	630x330x270	120	15/13
LD-557E	5m/16ft	19mm	670x360x270	120	24/22
LD-7H57X	7.5m/25ft	25mm	460x400x260	60	23/21
LD-857X	8m/26ft	25mm	460x400x260	60	25/23



Series 53-5

Double side printed steel tape measure

Model	Width	Thickness	QTY (mm)	PCS	KG
			QTY LBS.CU FT		
LD-253	2m/6ft	12.5mm	640x340x240	120	17/15
LD-353	3m/10ft	12.5mm	640x340x240	120	19/17
LD-353W	3m/10ft	16mm	640x340x280	120	18/16
LD-553E	5m/16ft	19mm	670x360x300	120	29/27
LD-553X	5m/16ft	25mm	670x360x345	120	35/33
LD-7H53X	7.5m/25ft	25mm	720x215x350	60	25/23
LD-1053X	10m/33ft	25mm	720x215x370	60	35/33



Series 77

Model	Width	Thickness	QTY (mm)	PCS	KG
			QTY LBS.CU FT		
LD-377W	3m/10ft	16mm	630x340x230	120	13/11
LD-3H77	3.5m/12ft	12.5mm	630x340x260	120	16/14
LD-577E	5m/16ft	19mm	670x340x270	120	26/24
LD-7H77X	7.5m/25ft	25mm	720x210x300	60	22/20
LD-877X	8m/26ft	25mm	720x210x300	60	23/21
LD-1077	10m/33ft	32mm	720x210x300	60	28/26



Series 68

Model	Width	Thickness	QTY (mm)	PCS	KG
			QTY LBS.CU FT		
LD-268W	2m/6ft	16mm	380x365x280	200	16/14
LD-368	3m/10ft	12.5mm	395x325x275	200	20/18
LD-368W	3m/10ft	16mm	380x365x280	200	24/22
LD-3H68	3.5m/12ft	12.5mm	395x325x275	200	26/24
LD-3H68W	3.5m/12ft	16mm	380x365x280	200	21/19
LD-568W	5m/16ft	16mm	530x320x190	120	24/22
LD-568E	5m/16ft	19mm	525x205x320	120	24/22
LD-568X	5m/16ft	25mm	440x230x320	100	18/16
LD-7H68X	7.5m/25ft	25mm	440x230x200	50	24/22
LD-1068X	10m/33ft	25mm	500x225x215	50	32/29



Series G1012

Model	Width	Thickness	QTY (mm)	PCS	KG
			QTY LBS.CU FT		
LD-G1012	10m/33ft	25mm	630x320x228	50	17/15



Height Measuring Tape (LD-SG01)

Item No.	Specification	Pack. dimen.(mm)	QTY	G.WIN W(kg)
101054001	2.5m	610x415x255	50	8/7



LAND GROUP
FOR NEXT MIRACLE

DIY Measure STEEL TAPE



Series 86-2

Model				QTY\LBS\CU FT	PCS	KG
LD-386-2	3m/10ft	12.5mm	640x340x240	120	17/15	
LD-386-2W	3m/10ft	16mm	640x330x280	120	19/17	
LD-586-2E	5m/16ft	19mm	670x360x300	120	29/27	
LD-586-2X	5m/16ft	25mm	670x360x345	120	35/33	
LD-7H86-2X	7.5m/25ft	25mm	720x215x350	60	25/23	
LD-1086-2X	10m/33ft	25mm	720x215x370	60	27/25	



Series N24

Model				QTY\LBS\CU FT	PCS	KG
LD-3N24W	3m/10ft	16mm	405x335x245	120	23/21	
LD-5N24E	5m/16ft	19mm	455x280x200	120	21/19	
LD-8N24X	8m/26ft	25mm	455x280x250	60	22/20	



LD-L10



LD-L104



Series N22

Model				QTY\LBS\CU FT	PCS	KG
LD-3N22	3m/10ft	12.5mm	405x335x245	120	32/21	



Series N11

Model				QTY\LBS\CU FT	PCS	KG
LD-5N11E	5m/16ft	19mm	490x340x260	120	24/22	



LD-C05



LD-C03



Series SX01

Model				QTY\LBS\CU FT	PCS	KG
LD-SX501E	5m/16ft	19mm	620x270x2x0	120	25/23	



Main Features:

- Double injection case, with attractive appearance and comfortable touch.
- With digital display, memory and backlight.
- With metric and inch dual system and convert in between.
- Reference side switch function.

Technical Data:

- Display resolution: 0.1cm
- Power supply: 3V button battery

Main Features:

- Small and handy, easy to carry.
- Attractive appearance.


• If you need any other product for gift, please tell us, we can design it just for you

Model				QTY\LBS\CU FT	PCS	KG
L10	1m	6mm	285x260x210	300	11/9	
L104	1m	10mm	248x247x223	300	16/14	



LAND GROUP
FOR NEXT MIRACLE

ProMeasure LONG STEEL TAPE

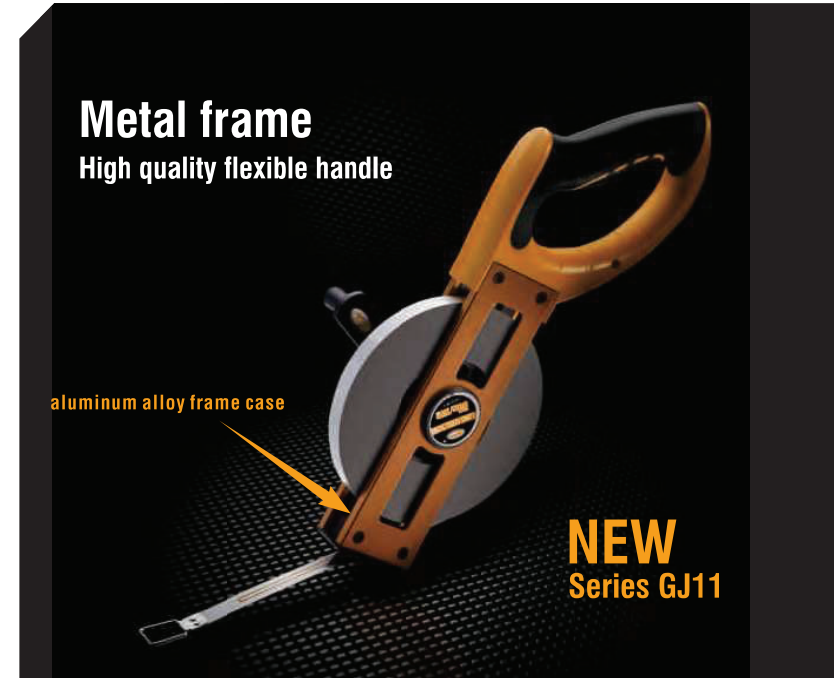

Main Features:

- 3X fast retracting the blade
- Co-molded rubber handle design, offers comfortable holding feel
- High quality blade with clear graduation

Packing Date:

Patent: ZL 2014 3 0075737.0

Model	Length	Width	QTY/LBS/ CU FT	PCS	KG
LD-GJ3019	30m	12.5mm			
LD-GJ5019	50m	12.5mm			

Main Features:

- Metal material frame & color oxidation surface treatment;
- High flexible handle with 2-injected TPR cover;
- A high quality gear inside for fast rewinding;
- Cool & popular appearance design;
- Nylon coated blade, more durable longer life expectancy.

Packing Date:

Model	Length	Width	QTY/LBS/ CU FT	PCS	KG
LD-GJ3011	30m	12.5mm	490*355*300	20	23/21
LD-GJ5011	50m	12.5mm	490*355*300	20	29/27



LAND GROUP
FOR NEXT MIRACLE

ProMeasure LONG STEEL TAPE

HOT 3X Fast retracting long steel tape



Series G18

Main Features

- 3X Fast retracting the blade.
- Co-molded rubber handle design, offers comfortable holding feel.
- High quality & comfortable handle.

Patent: 200920123162.9

Model	Blade	Thickness	QTY (mm)	PCS	KG
			LBS.CU FT		
LD-G3018	30m/100ft	12.5mm	510*265*155	20	13/11
LD-G5018	50m/165ft	12.5mm	510*305*180	20	18/16



Series G11



Series G09

Model	Blade	Thickness	QTY (mm)	PCS	KG
			LBS.CU FT		
LD-G1011	10m/33ft	10mm	730*420*230	60	15/13
LD-G1511	15m/50ft	10mm	730*420*230	60	18/16
LD-G2011	20m/66ft	10mm	730*420*230	60	21/19
LD-G3011	30m/100ft	10mm	730*420*230	60	27/25

Model	Blade	Thickness	QTY (mm)	PCS	KG
			LBS.CU FT		
LD-G1009	10m/33ft	12.5mm	390*210*190	50	12/10
LD-G1509	15m/50ft	12.5mm	365*265*270	50	16/14
LD-G2009	20m/66ft	12.5mm	365*265*270	50	20/18
LD-G3009	30m/100ft	12.5mm	365*265*270	50	27/25
LD-G5009	50m/165ft	12.5mm	325*300*180	20	18/16



Series G02



Series G01

Model	Blade	Thickness	QTY (mm)	PCS	KG
			LBS.CU FT		
LD-G1002	10m/33ft	10mm	420*190*175	50	9/8
LD-G1502	15m/50ft	10mm	420*252*200	50	13/12
LD-G2002	20m/66ft	10mm	420*252*200	50	16/14
LD-G3002	30m/100ft	10mm	420*252*245	50	21/19

Model	Blade	Thickness	QTY (mm)	PCS	KG
			LBS.CU FT		
LD-G1001	10m/33ft	10mm	355*190*170	50	9/8
LD-G1501	15m/50ft	10mm	355*190*170	50	12/10
LD-G2001	20m/66ft	10mm	355*250*220	50	16/14
LD-G3001	30m/100ft	10mm	355*265*235	50	23/21
LD-G5001	50m/165ft	10mm	540*340*180	30	24/22

NEW

3X Fast retracting open reel long steel tape



Series GJ10


Main Features

- 3X Fast retracting the blade, save time.
- With high quality strap, easy operation.
- High quality & comfortable handle.;
- Metal positioning tip.

Model	Blade	Thickness	QTY (mm)	PCS	KG
			LBS.CU FT		
LD-GJ3010	30m/100ft	12.5mm	570*340*250	10	9/7
LD-GJ5010	50m/165ft	12.5mm	570*340*250	10	11/9

NEW

3X Fast retracting open reel long steel tape

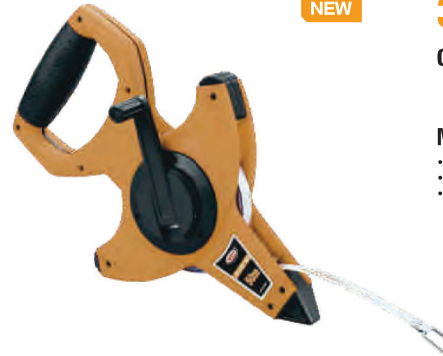

Series GJ9

Main Features

- 3X Fast retracting the blade, save time.
- With high quality strap, easy operation.
- High quality & comfortable handle.;

Model	Blade	Thickness	QTY (mm)	PCS	KG
			LBS.CU FT		
LD-GJ209	20m/66ft	12.5mm	320*423*268	10	9/7
LD-GJ309	30m/100ft	12.5mm	345*485*268	10	12/10
LD-GJ509	50m/165ft	12.5mm	415*605*268	10	18/16



LAND GROUP
FOR NEXT MIRACLE

ProMeasure LONG STEEL TAPE

Series GJ6 / GJ6-1



Model				QTY.LBS.CU FT	PCS	KG
LD-GJ206	20m/66ft	12.5mm	480×330×230	10	5/4	
LD-GJ306	30m/100ft	12.5mm	480×330×220	10	7/6	
LD-GJ506	50m/165ft	12.5mm	480×330×220	10	9/8	
LD-GJ1006	100m/330ft	12.5mm	480×330×230	10	18/16	
LD-GJ206-1	20m/66ft	12.5mm	390×320×210	10	6/5	
LD-GJ306-1	30m/100ft	12.5mm	390×320×210	10	9/8	
LD-GJ506-1	50m/165ft	12.5mm	390×320×210	10	14/13	



Series GJ6



Series GJ6-1



aluminum alloy frame case

Series GJ8

Model				QTY.LBS.CU FT	PCS	KG
LD-GJ308	30m/100ft	12.5mm	380×320×185	10	14/13	
LD-GJ508	50m/165ft	12.5mm	380×320×185	10	19/18	

Series GJ2



Model				QTY.LBS.CU FT	PCS	KG
LD-GJ202	20m/66ft	10mm	480×423×268	10	3/2	
LD-GJ302	30m/100ft	10mm	345×485×268	10	4/3	
LD-GJ502	50m/165ft	10mm	415×605×268	10	8/7	



Series GJ7

Model				QTY.LBS.CU FT	PCS	KG
LD-GJ207	20m/66ft	12.5mm	480×330×230	10	6/5	
LD-GJ307	30m/100ft	12.5mm	480×330×220	10	12/11	
LD-GJ507	50m/165ft	12.5mm	480×330×220	10	16/14	



LAND GROUP
FOR NEXT MIRACLE



With high quality of PVC as the material for tape blade, ABS for the case, with clear printing of graduation and up-to-date models, it is widely used in architecture engineering, sports games and field work for length measurement. The manual rolling fibreglass long tape has the lengths arranging from 5m to 100m in case or open reel. The tape blade is printed one side or double sides with only metric, or only British or metric-British graduations. It has features of erosion and erosion resistance, convenience for use, being handy and economical of customer's benefit.


For max. permissible tolerance see the table, if the length is within the minimal division value.

The max. permissible tolerance is calculated as per the following formula, if the number of length is bigger than the minimal division value:

$$\Delta = \pm(1.2+0.8 \cdot L)\text{mm} \quad \text{EEC Class III} \quad \Delta = \pm(0.6+0.4 \cdot L)\text{mm}$$

Note: Δ Max. permissible tolerance in mm. L-Length value. The bigger and most approx round-numbered value in metre is taken in case a measured length is less than around-numbered multiple of one metre. The permissible tolerance is to increase by $\pm 0.5\text{mm}$ if an extremity or combined measuring tool is used.

Reference Symbol:

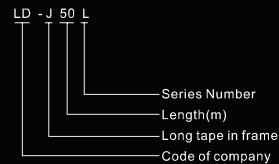

Reference Mark for Tape Width:


Minimal division value	Max.permissible tolerance
$i \leq 1$	± 0.3
$1 < i \leq 10$	± 1
$10 < i \leq 100$	± 1.5

ProMeasure
LONG STEEL TAPE

BLADE GRADUATION

021		Metric Graduation
022		British-metric Graduation
023		British Graduation
024		Metric Graduation
025		Tailor's tape(Metric Graduation)
026		Tailor's tape(inch Graduation)

Blade Graduation subject to the final products

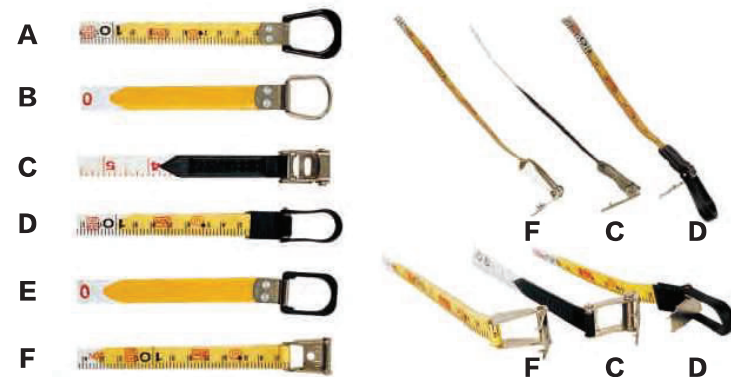



LAND GROUP
FOR NEXT MIRACLE

ProMeasure Fiberglass Tape



3X Fast
retracting fiberglass tape

NEW
Series 17

Main Features:

- 3X Fast retracting the blade, save time.
- Square ring easy to use.
- Co-molded rubber case offers comfortable grip.
- With high quality strap PVC blade, clear printed, erosion resistant and wearable.

Packing Date:

Model	Length	Blade Width	QTY.LBS.CU FT (mm)	PCS	KG
LD-2017	20m	13mm	530×380×520	60	22/20
LD-3017	30m	13mm	530×380×520	60	27/25
LD-5017	50m	13mm	500×470×430	30	24/22



Series 15 Series 12



Patent: 00305571.X

Model	Length	Blade Width	QTY.LBS.CU FT (mm)	PCS	KG
LD-1015	10m	13mm	530×270×300	60	14/12
LD-1515	15m	13mm	530×270×300	60	17/15
LD-2015	20m	13mm	530×350×385	60	20/18
LD-3015	30m	13mm	530×350×385	60	26/24
LD-5015	50m	13mm	550×242×415	30	20/18

Model	Length	Blade Width	QTY.LBS.CU FT (mm)	PCS	KG
LD-1012	10m	12.5mm	550×295×295	60	13/11
LD-1512	15m	13mm	550×295×295	60	17/15
LD-2012	20m	13mm	550×295×295	60	20/18
LD-3012	30m	13mm	550×350×350	60	26/24
LD-5012	50m	13mm	550×225×430	30	20/18



Series 09



Series 08

Model	Length	Blade Width	QTY.LBS.CU FT (mm)	PCS	KG
LD-1009	10m	13mm	580×235×235	60	13/11
LD-1509	15m	13mm	580×235×235	60	17/15
LD-2009	20m	13mm	580×295×295	60	20/18
LD-3009	30m	13mm	580×350×350	60	26/24
LD-5009	50m	13mm	580×350×350	30	20/18

Model	Length	Blade Width	QTY.LBS.CU FT (mm)	PCS	KG
LD-1008	10m	13mm	550×235×235	60	12/10
LD-1508	15m	13mm	550×295×295	60	16/14
LD-2008	20m	13mm	550×295×295	60	20/18
LD-3008	30m	13mm	550×350×350	60	26/24
LD-5008	50m	13mm	550×225×430	30	20/18



Series 06

Model	Length	Blade Width	QTY.LBS.CU FT (mm)	PCS	KG
LD-1006	10m	13mm	700×235×235	60	13/11
LD-1506	15m	13mm	700×295×295	60	17/15
LD-2006	20m	13mm	700×295×295	60	20/18
LD-3006	30m	13mm	700×350×350	60	26/24
LD-5006	50m	13mm	700×225×430	30	20/18



LAND GROUP
FOR NEXT MIRACLE



Series 05

Model	Length	Width	QTY(LBS,CU FT)	PCS	KG
LD-1005	10m	13mm	620*235*235	60	12/10
LD-1505	15m	13mm	620*295*295	60	16/14
LD-2005	20m	13mm	620*295*295	60	20/18
LD-3005	30m	13mm	620*350*350	60	26/24
LD-5005	50m	13mm	620*225*430	30	20/18



Series 01

Model	Length	Width	QTY(LBS,CU FT)	PCS	KG
LD-1001	10m	13mm	550*235*235	60	12/10
LD-1501	15m	13mm	550*295*295	60	16/14
LD-2001	20m	13mm	550*295*295	60	20/18
LD-3001	30m	13mm	550*350*350	60	26/24
LD-5001	50m	13mm	550*225*430	30	20/18



Series 07

Model	Length	Width	QTY(LBS,CU FT)	PCS	KG
LD-1007	10m	13mm	700x235x235	60	13/11
LD-1507	15m	13mm	700x295x295	60	17/15
LD-2007	20m	13mm	700x295x295	60	20/18
LD-3007	30m	13mm	700x350x350	60	26/24
LD-5007	50m	13mm	700x225x430	30	20/18

ProMeasure Fiberglass Tape



3X Fast
retracting open reel
fiberglass tape

NEW
Series J19

Main Features:

- Forged aluminium tip,chrome-plated handle,metal color,high grade.
- Soft handle with better feel.
- Printed label,beautiful and elegant.
- Triple winding speed.
- Beautiful and elegant general appearance.

Packing Date:

Patent:200930182029.6

Model	Length	Width	QTY(LBS,CU FT)	PCS	KG
LD-J3019	30m	13mm	570*340*250	10	8/6



3X Fast
retracting open reel
fiberglass tape

NEW
Series J10

Main Features:

- Forged aluminium tip,chrome-plated handle,metal color,high grade.
- Soft handle with better feel.
- Printed label,beautiful and elegant.
- Triple winding speed.
- Beautiful and elegant general appearance.

Packing Date:

Patent:200930182029.6

Model	Length	Width	QTY(LBS,CU FT)	PCS	KG
LD-J3010	30m	13mm	570*340*250	10	8/6



LAND GROUP
FOR NEXT MIRACLE

HOT



3X Fast retracting open reel fiberglass tape:

Main Features

- 3X Fast retracting the blade, saves time
- Co-molded rubber case, offers comfortable holding feel.
- High duty frame & comfortable handle, withstands extreme conditions.



Series J9

Patent:200830348839.X

Model	Length (m)	Width (mm)	QTY (mm) LBS.CU FT	PCS	KG
LD-J309	30m	13mm	345*340*455	12	9.5/8.5
LD-J509	50m	13mm	550*400*260	10	10/8
LD-J1009	100m	13mm	600*470*200	10	18/16

Series J7

Model	Length (m)	Width (mm)	QTY (mm) LBS.CU FT	PCS	KG
LD-J207	20m	13mm	470*330*420	20	9/8
LD-J307	30m	13mm	470*330*420	20	12/10



Series J6 / J6-1

Model	Length (m)	Width (mm)	QTY (mm) LBS.CU FT	PCS	KG
LD-J206	20m	13mm	430*260*360	20	9/8
LD-J306	30m	13mm	430*290*410	20	12/10
LD-J506	50m	13mm	440*330*490	10	16/14
LD-J206-1	20m	13mm	430*260*360	20	9/8
LD-J306-1	30m	13mm	400*315*400	20	12/10
LD-J506-1	50m	13mm	400*370*500	20	16/14



Series J3

Model	Length (m)	Width (mm)	QTY (mm) LBS.CU FT	PCS	KG
LD-J203	20m	13mm	430*260*360	20	9/8
LD-J303	30m	13mm	460*340*500	20	12/10
LD-J503	50m	13mm	470*377*512	20	16/14



Series J2

Model	Length (m)	Width (mm)	QTY (mm) LBS.CU FT	PCS	KG
LD-J202	20m	13mm	420*270*350	20	9/8
LD-J302	30m	13mm	420*305*410	20	12/10
LD-J502	50m	13mm	420*340*500	20	16/14



Series J1

Model	Length (m)	Width (mm)	QTY (mm) LBS.CU FT	PCS	KG
LD-J101	10m	13mm	400*220*260	20	7/6
LD-J201	20m	13mm	420*270*350	20	9/8
LD-J301	30m	13mm	420*305*500	20	12/10
LD-J501	50m	13mm	420*340*500	20	16/14
LD-J1001	100m	13mm	420*340*440	10	16/14

DIY Measure

**DISTANCE
MEASURING WHEEL**



LD-DW3

LD-DW2



LAND GROUP
FOR NEXT MIRACLE

ProLevel

DISTANCE MEASURING WHEEL



LD-DW1

DISTANCE MEASURING WHEEL

Patent:01254325.X

Model	(mm) QTY.LBS.CU FT	PCS	KG
LD-DW1	345×320×495	2	5/4
LD-DW1	625×345×495	4	10/8
LD-DW1	775×345×495	5	12/10
LD-DW1	930×345×495	6	14/12.5

Main Features

- Handy structure,stretchable handle,easy to carry.
- With digital display and memory.
- With metric and inch dual system,you may also convert in between.
- With stand.
- Double injection wheel,even suitable for slippery ground.

Technical Data:

- Display resolution:0.1m
- Tolerance: <0.5%
- Measuring range:0-10000m
- Power supply:2XLR3 batteries



DIGITAL DISPLAY MEASURING WHEEL

Patent:2006301368.8

Model	(mm) QTY.LBS.CU FT	PCS	KG
LD-DW2	360×200×730	4	6/4.5
LD-DW2	450×190×720	5	8/6
LD-DW2	360×275×720	6	9/7



LD-DW2

LD-DW3



DISTANCE MEASURING WHEEL

Patent:01254325.X

Model	(mm) QTY.LBS.CU FT	PCS	KG
LD-DW3	345×320×495	2	5/4
LD-DW3	625×345×495	4	10/8
LD-DW3	775×345×495	5	12/10
LD-DW3	930×345×495	6	14/12.5



LAND GROUP
FOR NEXT MIRACLE

ProLevel Level



Reference Symbol:

Type code	Meaning
J	Bridge
K	Frame
S	Plastic
C	Magnetic
G	Steel Tape

With the application of high quality aluminum alloy and high transparent, super clear vials and aluminum spirit level features high sensitivity to the variation of measured surface position when it is placed on an object. It is widely applied not only in the architecture engineering, room decoration and sports to examine the horizontal and vertical position of an object, and even the object at 45° angle, but in people's daily life to detect the levelness as well.

It acquires up-to-date models and excellent presentation with the style of frame, bridge, compound and bar shapes, it can also be printed with metric or British graduation on the sides of the level. It offers convenience to customers.


Struc code	Meaning
A	2 vials, horizontal & vertical resp
B	3 vials, horizontal & 45° leaning resp
C	2 vials, & with graduation
D	3 vials, & with graduation



LD-2013

Main Features:

- High accuracy vials with three lines, guaranteed by numerical control processing, twice higher accuracy than normal one
- Milled on both top and bottom sides, more precise and more professional
- Colorful painted surface with high intensity to be more durable
- Shockproof with co-molded cap
- Co-molded handle, with comfortable grip (40cm without handle)
- With or without magnet is optional



LD-2007B

Main Features:

- CO-molded rubber handle, offers comfortable holding feel
- CO-molded rubber end caps protect against shock when dropped or bumped
- Aerofoil 180° vial seating design for better looking



LD-2007-2B

Main Features:

- Shiny and colourful oxidized level body, wearable, with high intensity
- TPR-covered caps to resist shock
- CO-molded rubber handle, offers comfortable holding feel
- High accuracy triplelined vials
- Magnetic bottom



LAND GROUP
FOR NEXT MIRACLE

ProLevel Level

LD-2007-3B



PRO*EX Spirit levels

- High - grade aluminium walls with increased thickness to stand up the wear and tear of the toughest jobsite
- Smooth easy to clean anodised aluminium body, ensures the level is protected from corrosion
- Milled top and bottom edges ensure an accuracy of 0.5mm/m
- Shock absorbing rubber end-caps
- Innovative high accuracy vials in blue
- Highly visible ,dual sided ,undistorted rubber protected vials set at 45 90 and 180



LD-2014

Main Features:

- High accuracy vials with three lines, guaranteed by numerical control processing, twice higher accuracy than normal one
- Milled on both top and bottom sides, more precise and more professional
- Colorful painted surface with high intensity to be more durable

Patent: ZL 201430149436.8



LD-2010B/2010-1B

Main Features:

- UV Resistant Vial
- High Accuracy Vial

LD-2010-1B



LD-2009B

Main Features:

- High accuracy 180° vial.
- Super co-molded rubber handle, offer comfortable holding feel
- Co-molded rubber end caps, shockproof
- With LED Light for darkness



LD-SX2002

Main Features:

- High quality aluminium alloy body, sandy finish
- 360 degree measurement
- Big LCD
- Sound reminder at 0° / 45° / 90°
- Data hold function
- When the level is put up side down, the display will turn the right side up automatically, easy for reading
- Conversion between slope and normal degree



LAND GROUP
FOR NEXT MIRACLE

ProLevel Level

Model	Product picture		PCS
LD-2008-1B			
LD-2003B		(length+18)×310×140mm	20
LD-2005B		(length+18)×310×320mm (length+18)×310×200mm (length+18)×310×140mm (length+18)×165×140mm	50 30 20 10
LD-2003-2B		(length+18)×290×260mm (length+18)×290×164mm (length+18)×290×115mm (length+18)×155×115mm	50 30 20 10
LD-2003-3B		(length+18)×290×260mm (length+18)×290×164mm (length+18)×290×115mm (length+18)×155×115mm	50 30 20 10
LD-2003-4B		(length+18)×270×320mm (length+18)×270×200mm (length+18)×270×140mm (length+18)×145×140mm	50 30 20 10
LD-2002B			
LD-2002-1A		(length+18)×260×320mm (length+18)×300×340mm (length+18)×300×212mm (length+18)×300×148mm	50 50 30 20

Model	Product picture		PCS
LD-2000B		(length+18)×240×320mm (length+18)×240×200mm (length+18)×240×140mm	50 30 20
LD-2000-1B		(length+18)×240×280mm (length+18)×240×178mm	50 30
LD-2001-1B		(length+18)×280×320mm (length+18)×280×200mm (length+18)×160×140mm	50 30 10
LD-98B		(length+18)×300×320mm (length+18)×300×200mm (length+18)×300×140mm	50 30 20
LD-97B		(length+18)×260×320mm (length+18)×260×200mm (length+18)×260×140mm	50 30 20
LD-97-4B		(length+18)×300×320mm (length+18)×300×200mm (length+18)×300×140mm	50 30 20
LD-97-3B		(length+18)×260×320mm (length+18)×260×200mm (length+18)×260×140mm	50 30 20
LD-97-1B		(length+18)×300×320mm (length+18)×300×200mm (length+18)×300×140mm	50 30 20



LAND GROUP
FOR NEXT MIRACLE

ProLevel Level

Model	Product picture		PCS
LD-95-1B		(length+18)x220x270mm (length+18)x220x162mm (length+18)x220x108mm	50 30 20
LD-95B		(length+18)x220x270mm (length+18)x220x162mm (length+18)x220x108mm	50 30 20
LD-93-2B	 Scalable	(length+18)x245x260mm	50
LD-91-5B		(length+18)x210x265mm	50
LD-91-2B		(length+18)x230x270mm	50
LD-91-1B		(length+18)x210x265mm	50
LD-91B		(length+18)x250x265mm	
LD-90-1B		(length+18)x260x265mm	50

Model	Product picture		PCS
LD-88D		(length+18)x200x260mm	50
LD-87B		(length+18)x265x290mm	50
LD-87C		(length+18)x275x310mm	50
LD-87D		(length+18)x275x310mm	50
LD-82-1B		(length+18)x260x280mm	50
LD-C95B		(length+18)x245x290mm	50
LD-C82-1B		(length+18)x260x290mm	
LD-J89A		(length+18)x260x220mm	
LD-J89C			
LD-J96A			
LD-S93B			
LD-C93B			



LAND GROUP
FOR NEXT MIRACLE

ProLevel Level




Aluminium Patter(LD-LGC-3)

- Make the perfect surface



- CROSS SECTIONAL
- DIMENSIONS 95×7.5mm

Item No.	Specification	Pack. dimen.(mm)	QTY	G.W/N.W(kg)
104061006	80cm	820×320×205	20	23/22
104061008	100cm	1020×320×205	20	29/28
104061009	120cm	1220×320×205	20	35/34
104061012	200cm	2020×320×205	20	58/57



Aluminium Patter(LD-LGC-6)

- Examine smoothness of the surface



- CROSS SECTIONAL
- DIMENSIONS 90×20mm

Item No.	Specification	Pack. dimen.(mm)	QTY	G.W/N.W(kg)
104063008	100cm	1020×200×110	10	7.5/6.5
104063009	120cm	1220×200×110	10	9/8
104063010	150cm	1520×200×110	10	11/10
104063012	200cm	2020×200×110	10	15/13
104063014	300cm	3020×200×110	10	21.5/20



Aluminium Patter(LD-LGC-5)

- Scrap and make the surface balance



- CROSS SECTIONAL
- DIMENSIONS 95×18mm
- Floating rough surface

Item No.	Specification	Pack. dimen.(mm)	QTY	G.W/N.W(kg)
104063008	100cm	1020×200×110	10	7.5/6.5
104063009	120cm	1220×200×110	10	9/8
104063010	150cm	1520×200×110	10	11/10
104063012	200cm	2020×200×110	10	15/13.5
104063015	200cm	3020×200×110	10	15/13.5



Aluminium Patter(LD-LGC-2)

- Scrap and make the surface balance



- CROSS SECTIONAL
- DIMENSIONS 106×26mm
- Floating rough surface

Item No.	Specification	Pack. dimen.(mm)	QTY	G.W/N.W(kg)
104060008	100cm	1020×200×110	10	8.5/7.5
104060009	120cm	1220×200×110	10	10/9
104060010	150cm	1520×200×110	10	12/11
104060012	200cm	2020×200×110	10	16/14.5
104060014	300cm	3020×200×110	10	22.5/21



LD-SXJD-01 Digital Display Angle Finder

Main Features:

- Oxidized aluminum alloy body.
- Measuring angle between 0°-185°

Technical data:

- Accuracy:±1°
- Power supply:1×9V alkaline battery



LD-LS05JD



LD-JD01